

1AP7 Rec'd PCT/PTO 16 MAY 2006


PTO/SB/21 (09-04)

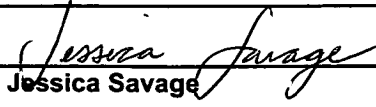
Approved for use through 07/31/2006. OMB 0651-0031
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

TRANSMITTAL FORM (to be used for all correspondence after initial filing)	Application Number	10/576,172
	Filing Date	18 April 2006
	First Named Inventor	Luhong Liang
	Art Unit	
	Examiner Name	
Total Number of Pages in This Submission	47	Attorney Docket Number 42P22441

ENCLOSURES (Check all that apply)		
<input type="checkbox"/> Fee Transmittal Form <input type="checkbox"/> Fee Attached <input type="checkbox"/> Amendment/Reply <input type="checkbox"/> After Final <input type="checkbox"/> Affidavits/declaration(s) <input type="checkbox"/> Extension of Time Request <input type="checkbox"/> Express Abandonment Request <input type="checkbox"/> Information Disclosure Statement <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) <input type="checkbox"/> Reply to Missing Parts/ Incomplete Application <input type="checkbox"/> Reply to Missing Parts under 37 CFR 1.52 or 1.53	<input type="checkbox"/> Drawing(s) <input type="checkbox"/> Licensing-related Papers <input type="checkbox"/> Petition <input type="checkbox"/> Petition to Convert to a Provisional Application <input type="checkbox"/> Power of Attorney, Revocation <input type="checkbox"/> Change of Correspondence Address <input type="checkbox"/> Terminal Disclaimer <input type="checkbox"/> Request for Refund <input type="checkbox"/> CD, Number of CD(s) _____ <input type="checkbox"/> Landscape Table on CD	<input type="checkbox"/> After Allowance Communication to TC <input type="checkbox"/> Appeal Communication to Board of Appeals and Interferences <input type="checkbox"/> Appeal Communication to TC (Appeal Notice, Brief, Reply Brief) <input type="checkbox"/> Proprietary Information <input type="checkbox"/> Status Letter <input checked="" type="checkbox"/> Other Enclosure(s) (please identify below): Return Receipt Postcard
Remarks <input style="width: 100px;" type="text"/>		

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT			
Firm Name	BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN, LLP 12400 Wilshire Boulevard, Seventh Floor, Los Angeles, CA 90025-1030		
Signature			
Printed name	Lester J. Vincent		
Date	16 May 2006	Reg. No.	31,460

CERTIFICATE OF TRANSMISSION/MAILING			
I hereby certify that this correspondence is being deposited with the United States Postal Service on the date shown below with sufficient postage as first class mail in an envelope addressed to: Mail Stop PCT, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.			
Signature			
Typed or printed name	Jessica Savage	Date	16 May 2006

This collection of information is required by 37 CFR 1.5. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

中华人民共和国国家知识产权局
STATE INTELLECTUAL PROPERTY OFFICE
OF THE PEOPLE'S REPUBLIC OF CHINA



证 明 CERTIFICATE

本证明之附件是向中国专利局作为受理局提交的下列国际申请副本
IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY OF THE BELOW
IDENTIFIED INTERNATIONAL APPLICATION THAT WAS FILED WITH THE
CHINESE PATENT OFFICE AS RECEIVING OFFICE

申请号: PCT/CN2005/001620

INTERNATIONAL APPLICATION NUMBER

申请日: 29. SEP 2005(29.09.2005)

INTERNATIONAL FILING DATE

名称: ERROR DIFFUSION FOR DISPLAY FRAME BUFFER POWRE

INVENTION SAVING

中华人民共和国国家知识产权局局长

COMMISSIONER OF THE STATE INTELLECTUAL PROPERTY
OFFICE OF THE PEOPLE'S REPUBLIC OF CHINA

二零零六年四月十日

APRIL 10, 2006

HOME COPY

PCT

REQUEST

The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty.

For receiving Office use only

PCT/CN 2005 / 0 0 1 6 2 0

International Application No.

2 9 · SEP 2005 (2 9 · 0 9 · 2 0 0 5)

International Filing Date

 RO/CN 中华人民共和国国家知识产权局
 PCT International Application
 Name of receiving Office and of International Application

 Applicant's or agent's file reference
 (if desired) (12 characters maximum) FPEL05150047

Box No. I TITLE OF INVENTION

ERROR DIFFUSION FOR DISPLAY FRAME BUFFER POWER SAVING

Box No. II APPLICANT

☐ This person is also inventor

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

INTEL CORPORATION
 2200 Mission College Blvd.
 Santa Clara, California 95052
 United States of America

Telephone No.

Facsimile No.

Teleprinter No.

Applicant's registration No. with the Office

 State (that is, country) of nationality:
 US

 State (that is, country) of residence:
 US

 This person is applicant
 for the purposes of:
☐ all designated States☒ all designated States except the United States of America☐ the United States of America only☐ the States indicated in the Supplemental Box

Box No. III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

LIANG, Luhong
 8F, Raycom Infotech Part A,
 No. 2 Kexueyuan South Road
 Zhong Guan Cun Haidian District
 Beijing 100080
 P. R. of China

This person is:

☐ applicant only☒ applicant and inventor☐ inventor only (If this check-box is marked, do not fill in below.)

Applicant's registration No. with the Office

 State (that is, country) of nationality:
 CN

 State (that is, country) of residence:
 CN

 This person is applicant
 for the purposes of:
☐ all designated States☐ all designated States except the United States of America☒ the United States of America only☐ the States indicated in the Supplemental Box☒ Further applicants and/or (further) inventors are indicated on a continuation sheet.

Box No. IV AGENT OR COMMON REPRESENTATIVE; OR ADDRESS FOR CORRESPONDENCE

The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as:

☒ agent☐ common representative

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)

China Patent Agent (H.K.) Ltd.
 22/F, Great Eagle Centre
 23 Harbour Road, Wanchai
 Hong Kong Special Administrative Region
 The People's Republic of China

Telephone No.

(852)28284688

Facsimile No.

(852)28271018

Teleprinter No.

Agent's registration No. with the Office

☐ Address for correspondence: Mark this check-box where no agent or common representative is/has been appointed and the space above is used instead to indicate a special address to which correspondence should be sent.

Sheet No. ...2...

Continuation of Box No. III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)*If none of the following sub-boxes is used, this sheet should not be included in the request.*

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

HE, Janet
8F, Raycom Infotech Part A,
No. 2 Kexueyuan South Road
Zhong Guan Cun Haidian District
Beijing 100080
P. R. of China

This person is:

- ☐ applicant only
☒ applicant and inventor
☐ inventor only (If this check-box is marked, do not fill in below.)

Applicant's registration No. with the Office

State (that is, country) of nationality:
CN

State (that is, country) of residence:
CN

This person is applicant for the purposes of:

☐ all designated States☐ all designated States except the United States of America☒ the United States of America only☐ the States indicated in the Supplemental Box

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

CHEN, Rui
5/F., A Wing, ZTE Plaza
Keji Road South, Hi-Tech Industrial Park
Nanshan District, Shenzhen
P. R. of China

This person is:

- ☐ applicant only
☒ applicant and inventor
☐ inventor only (If this check-box is marked, do not fill in below.)

Applicant's registration No. with the Office

State (that is, country) of nationality:
CN

State (that is, country) of residence:
CN

This person is applicant for the purposes of:

☐ all designated States☐ all designated States except the United States of America☒ the United States of America only☐ the States indicated in the Supplemental Box

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

This person is:

- ☐ applicant only
☐ applicant and inventor
☐ inventor only (If this check-box is marked, do not fill in below.)

Applicant's registration No. with the Office

State (that is, country) of nationality:

State (that is, country) of residence:

This person is applicant for the purposes of:

☐ all designated States☐ all designated States except the United States of America☐ the United States of America only☐ the States indicated in the Supplemental Box

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

This person is:

- ☐ applicant only
☐ applicant and inventor
☐ inventor only (If this check-box is marked, do not fill in below.)

Applicant's registration No. with the Office

State (that is, country) of nationality:

State (that is, country) of residence:

This person is applicant for the purposes of:

☐ all designated States☐ all designated States except the United States of America☐ the United States of America only☐ the States indicated in the Supplemental Box

☐ Further applicants and/or (further) inventors are indicated on another continuation sheet.

Box No. V DESIGNATIONS

The filing of this request constitutes under Rule 4.9(a), the designation of all Contracting States bound by the PCT on the international filing date, for the grant of every kind of protection available and, where applicable, for the grant of both regional and national patents.

However,

- ☐ DE Germany is not designated for any kind of national protection
- ☐ KR Republic of Korea is not designated for any kind of national protection
- ☐ RU Russian Federation is not designated for any kind of national protection

(The check-boxes above may be used to exclude (irrevocably) the designations concerned in order to avoid the ceasing of the effect, under the national law, of an earlier national application from which priority is claimed. See the Notes to Box No. V as to the consequences of such national law provisions in these and certain other States.)

Box No. VI PRIORITY CLAIM

The priority of the following earlier application(s) is hereby claimed:

Filing date of earlier application (day/month/year)	Number of earlier application	Where earlier application is:		
		national application: country or Member of WTO	regional application:* regional Office	international application: receiving Office
item (1)				
item (2)				
item (3)				

☐ Further priority claims are indicated in the Supplemental Box.

The receiving Office is requested to prepare and transmit to the International Bureau a certified copy of the earlier application(s) (only if the earlier application was filed with the Office which for the purposes of this international application is the receiving Office) identified above as:

☐ all items ☐ item (1) ☐ item (2) ☐ item (3) ☐ other, see Supplemental Box

* Where the earlier application is an ARIPO application, indicate at least one country party to the Paris Convention for the Protection of Industrial Property or one Member of the World Trade Organization for which that earlier application was filed (Rule 4.10(b)(ii)). . . .

Box No. VII INTERNATIONAL SEARCHING AUTHORITY

Choice of International Searching Authority (ISA) (if two or more International Searching Authorities are competent to carry out the international search, indicate the Authority chosen; the two-letter code may be used):

ISA / CN

Request to use results of earlier search; reference to that search (if an earlier search has been carried out by or requested from the International Searching Authority):

Date (day/month/year)

Number

Country (or regional Office)

Box No. VIII DECLARATIONS

The following declarations are contained in Boxes Nos. VIII (i) to (v) (mark the applicable check-boxes below and indicate in the right column the number of each type of declaration):

Number of
declarations

- | | | |
|---|--|---|
| <input type="checkbox"/> Box No. VIII (i) | Declaration as to the identity of the inventor | : |
| <input type="checkbox"/> Box No. VIII (ii) | Declaration as to the applicant's entitlement, as at the international filing date, to apply for and be granted a patent | : |
| <input type="checkbox"/> Box No. VIII (iii) | Declaration as to the applicant's entitlement, as at the international filing date, to claim the priority of the earlier application | : |
| <input type="checkbox"/> Box No. VIII (iv) | Declaration of inventorship (only for the purposes of the designation of the United States of America) | : |
| <input type="checkbox"/> Box No. VIII (v) | Declaration as to non-prejudicial disclosures or exceptions to lack of novelty | : |

Box No. IX CHECK LIST; LANGUAGE OF FILING

This international application contains:		This international application is accompanied by the following item(s) (mark the applicable check-boxes below and indicate in right column the number of each item):	Number of items
(a) in paper form, the following number of sheets:		1. <input checked="" type="checkbox"/> fee calculation sheet	: 1
request (including declaration sheets) :	4	2. <input checked="" type="checkbox"/> original separate power of attorney	: 1
description (excluding sequence listing and/or tables related thereto) :	22	3. <input type="checkbox"/> original general power of attorney	:
claims :	6	4. <input type="checkbox"/> copy of general power of attorney; reference number, if any:	:
abstract :	1	5. <input type="checkbox"/> statement explaining lack of signature	:
drawings :	11	6. <input type="checkbox"/> priority document(s) identified in Box No. VI as item(s):	:
Sub-total number of sheets :	44	7. <input type="checkbox"/> translation of international application into (language):	:
sequence listing :		8. <input type="checkbox"/> separate indications concerning deposited microorganism or other biological material	:
tables related thereto :		9. <input type="checkbox"/> sequence listing in computer readable form (indicate type and number of carriers)	:
(for both, actual number of sheets if filed in paper form, whether or not also filed in computer readable form; see (c) below)		(i) <input type="checkbox"/> copy submitted for the purposes of international search under Rule 13ter only (and not as part of the international application) :	
Total number of sheets :	44	(ii) <input type="checkbox"/> (only where check-box (b)(i) or (c)(i) is marked in left column) additional copies including, where applicable, the copy for the purposes of international search under Rule 13ter :	
(b) <input type="checkbox"/> only in computer readable form (Section 801(a)(i))		(iii) <input type="checkbox"/> together with relevant statement as to the identity of the copy or copies with the sequence listing mentioned in left column :	
(i) <input type="checkbox"/> sequence listing		10. <input type="checkbox"/> tables in computer readable form related to sequence listing (indicate type and number of carriers)	
(ii) <input type="checkbox"/> tables related thereto		(i) <input type="checkbox"/> copy submitted for the purposes of international search under Section 802(b-quater) only (and not as part of the international application)	
(c) <input type="checkbox"/> also in computer readable form (Section 801(a)(ii))		(ii) <input type="checkbox"/> (only where check-box (b)(ii) or (c)(ii) is marked in left column) additional copies including, where applicable, the copy for the purposes of international search under Section 802(b-quater) :	
(i) <input type="checkbox"/> sequence listing		(iii) <input type="checkbox"/> together with relevant statement as to the identity of the copy or copies with the tables mentioned in left column :	
(ii) <input type="checkbox"/> tables related thereto		11. <input type="checkbox"/> other (specify):	
Type and number of carriers (diskette, CD-ROM, CD-R or other) on which are contained the			
<input type="checkbox"/> sequence listing:			
<input type="checkbox"/> tables related thereto:			
(additional copies to be indicated under items 9(ii) and/or 10(ii), in right column)			
Figure of the drawings which should accompany the abstract:		Language of filing of the international application: EN	

Box No. X SIGNATURE OF APPLICANT, AGENT OR COMMON REPRESENTATIVE

Next to each signature, indicate the name of the person signing and the capacity in which the person signs (if such capacity is not obvious from reading the request).



For receiving Office use only		For International Bureau use only	
1. Date of actual receipt of the purported international application: 29 - SEP 2005 (29 - 09 - 2005)		2. Drawings:	
3. Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application:		<input type="checkbox"/> received:	
4. Date of timely receipt of the required corrections under PCT Article 11(2):		<input type="checkbox"/> not received:	
5. International Searching Authority (if two or more are competent): ISA /		6. <input type="checkbox"/> Transmittal of search copy delayed until search fee is paid	

Date of receipt of the record copy by the International Bureau:

This sheet is not part of and does not count as a sheet of the international application.

PCT

FEE CALCULATION SHEET

Annex to the Request

For receiving Office use only

PCT/CN 2005 / 0 0 1 6 2 0

International Application No.

29 · SEP 2005 (29 · 09 · 2005)

Date stamp of the receiving Office

Applicant's or agent's
file reference

FPEL05150047

Applicant

INTEL CORPORATION etc.

CALCULATION OF PRESCRIBED FEES

1. TRANSMITTAL FEE

CNY500

T

2. SEARCH FEE

CNY1500

S

International search to be carried out by

CN

(If two or more International Searching Authorities are competent to carry out the international search, indicate the name of the Authority which is chosen to carry out the international search.)

3. INTERNATIONAL FILING FEE

Where items (b) and/or (c) of Box No. IX apply, enter Sub-total number of sheets

44

Where items (b) and (c) of Box No. IX do not apply, enter Total number of sheets

i1 first 30 sheets

CHF1400

i1

i2

14

x

CHF15

= CHF210

i2

number of sheets
in excess of 30

fee per sheet

i3

additional component (only if sequence listing and/or tables related thereto are filed in computer readable form under Section 801(a)(i), or both in that form and on paper, under Section 801(a)(ii)):

400 x

fee per sheet

i3

Add amounts entered at i1, i2 and i3 and enter total at I

CHF1 610

I

(Applicants from certain States are entitled to a reduction of 75% of the international filing fee. Where the applicant is (or all applicants are) so entitled, the total to be entered at I is 25% of the international filing fee.)

4. FEE FOR PRIORITY DOCUMENT (if applicable)

P

5. TOTAL FEES PAYABLE

CNY2000CHF1610

Add amounts entered at T, S, I and P, and enter total in the TOTAL box

TOTAL

MODE OF PAYMENT

☒ authorization to charge
deposit account (see below)

☐ postal money order

☐ cash

☐ coupons

☐ cheque

☐ bank draft

☐ revenue stamps

☐ other (specify):

AUTHORIZATION TO CHARGE (OR CREDIT) DEPOSIT ACCOUNT

(This mode of payment may not be available at all receiving Offices)

☒ Authorization to charge the total fees indicated above.

☒ (This check-box may be marked only if the conditions for deposit accounts of the receiving Office so permit) Authorization to charge any deficiency or credit any overpayment in the total fees indicated above.

☒ Authorization to charge the fee for priority document.

Receiving Office: RO/ CN

Deposit Account No. 092922005

Date:

Name:

Signature:



ERROR DIFFUSION FOR DISPLAY FRAME BUFFER POWER SAVING

FIELD

[0001] Embodiments of the invention relate to data processing systems; and more specifically, to error diffusion for display frame buffer of a data processing system.

BACKGROUND

[0002] Today, pocket-PCs, PDAs (Personal Data Assistants), mobile phones, digital cameras and camcorders are equipped with color TFT (Thin-Film Transistor) LCDs (Liquid Crystal Displays), power-efficient STN (Super-Twisted Nematic) LCD or OLED (Organic Light-Emitting Diode). A display sub-system has become a major energy consumer even though the systems are equipped with a powerful CPUs and with a tens of MBs of SDRAM. In both LCD and OLED, a frame buffer is an indispensable ingredient which consumes a large portion of the energy.

[0003] One of the low power frame buffer techniques is the dynamic-color-depth control technique, in which a new pixel organization is proposed to enable the shut down the LSD (least significant device) of the frame buffer. In this case, the power consumption of the frame buffer memory and the associated logic is reduced. However, this technique causes obvious false contour artifacts in the image/video.

[0004] Other techniques have been proposed for power reduction in display sub-system, including variable duty-ratio refresh by reducing the refresh rate of a frame buffer and brightness and contrast shift by dimming backlight luminance and adjusting the image luminance synchronously. However, these techniques cause obvious image/video quality degeneration.

[0005] In addition, a halftoning-based technique has been proposed to reduce the frame buffer for handset application. In this technique, the original 24-bit RGB color data is converted to 18-bit or 15-bit color data, and ordered dithering technique is used to remove the false contour artifacts caused by quantization. However, it produces artifacts of patterns introduced by fixed thresholding matrices.

[0006] Further, a frame buffer compression technique has been proposed for reducing power consumption of a display sub-system. In this technique, a frame buffer is separated into an uncompressed page and a compressed page. The original data is initially sent into the uncompressed page during a normal power mode. In a low power mode, an encoder compresses the original data into the compressed page, and the LCD panel refreshing operations only access the compressed page with much less bits. Therefore, the number of frame buffer bit access is reduced as well as the corresponding power consumption. However, this technique is not efficient in images.

[0007] Furthermore, an error diffusion technique has been widely used in the printing field. Error diffusion technique is a specific method of halftoning that represents more color using small number of color. In this technique, the algorithm functions are performed on each image pixel. For the red, green, and blue components of each pixel, an error between the original and quantized values is computed. The error that is determined to occur at the central pixel is then distributed among the surrounding pixels. However, this technique involves complex computation which may require a relatively large processing power.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Embodiments of the invention may best be understood by referring to the following description and accompanying drawings that are used to illustrate embodiments of the invention. In the drawings:

[0009] Figure 1 illustrates various images as results of conventional methods and methods according to certain embodiments.

[0010] Figure 2 is a diagram illustrating a data format of a frame buffer according to one embodiment.

[0011] Figures 3-5 are block diagrams illustrating various embodiments of display subsystems.

[0012] Figure 6A is a flow diagram illustrating a process example of a display subsystem according to one embodiment.

[0013] Figure 6B is a flow diagram illustrating a process example of an error diffusion operation according to one embodiment.

[0014] Figure 7 is a pseudo code of a process for an error diffusion operation according to one embodiment.

[0015] Figure 8 is a flow diagram illustrating a process example of an error diffusion operation according to another embodiment.

[0016] Figure 9 is a pseudo code of a process for an error diffusion operation according to another embodiment.

[0017] Figure 10 is a block diagram illustrating an example of a data processing system that may be used as an embodiment.

DETAILED DESCRIPTION

[0018] Methods and apparatuses for error diffusion for display frame buffer power saving are described herein. According to certain aspects of the invention, an effective low power display techniques are employed by shutting down the LSD of the frame buffer memory while preserving the image quality. According to one embodiment, a simplified error diffusion algorithm (for example, implemented as an Error Diffusion Encoder) is utilized that encodes the images with full color depth to the ones with reduced color depths without generating false contour artifacts as shown in image 103 generated from image 102 of Figure 1. The Error Diffusion Encoder can be implemented in a display driver, application software, and/or in hardware modules, such as a display controller, GMCH (graphics and memory control hub), and/or equivalent chips.

[0019] Compared with a conventional dynamic-color-depth control technique, the technique described herein is able to overcome the false contour artifacts caused by the directly shutting down the LSD of frame buffer memory, as shown image 101 generated from image 102 of Figure 1. Compared with the conventional run-length-coding frame buffer compression technique, the technique described herein is much more efficient for the image and video content as well as the text and graphics contents. While the conventional technique is only efficient for text and simple graphics contents, since the run-length-coding algorithm is not able to compress the image and video contents very efficiently, which causes the power saving for image and video is very limited. Compared with the conventional dithering technique, the complexity of the technique described herein is much lower and is able to reduce the color depth, for example, from 24 bits to 8 or 9 bits, while the conventional technique just reduces the color depth to 15 or 18 bits.

[0020] In the following description, numerous details are set forth to provide a more thorough explanation embodiments of the present invention. It will be apparent, however, to one skilled in the art, that embodiments of the present invention may be practiced without these specific details. In other instances, well-known structures and devices are shown in block diagram form, rather than in detail, in order to avoid obscuring embodiments of the present invention.

[0021] Reference in the specification to “one embodiment” or “an embodiment” means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the invention. The appearances of the phrase “in one embodiment” in various places in the specification do not necessarily all refer to the same embodiment. Reference in the specification to “image” means image, one frame of video, or 2D/3D graphics contents stored in image data format for display.

[0022] According to one embodiment, an error diffusion mechanism is proposed to process the image data writing into the frame buffer memory, in order to remove these artifacts while saving the power consumption at the same time.

[0023] In one embodiment, an error diffusion encoder may be implemented in a display sub-system hardware and/or software to remove the image artifacts when the LSD of frame buffer memory is shut down for power reduction. In addition, according to one embodiment, a 2-neighborhood error filter and the error-bit-reduction approach are utilized to reduce the computational complexity of the classical error diffusion algorithm to reduce the energy consumption and cost of the error diffusion encoder. Further, certain software and/or hardware embodiments of the Error Diffusion Encoder may be utilized to provide a low power work mode of the display sub-system. Although an error diffusion encoder may be implemented in a display controller, similar designs may be applied to display sub-systems with different color depth and data storage format to achieve the similar functionality.

[0024] An image with large number of colors can be represented by small number of colors without false contour artifacts using the error diffusion technique. In one embodiment of the invention, the error diffusion technique is used to represent an original image with full color depth by pixels with reduced color depth. In a particular embodiment, the modified algorithm acts as an encoder (e.g., Error Diffusion Encoder) to translate the original image to the image with lower color depth to fit with the MSD of the frame buffer, when it is required to shut down or reduce power of the LSD of the frame buffer memory to reduce the power consumption.

[0025] According to one embodiment, the bit order in a frame buffer may be reorganized. Referring to Figure 2, the conventional physical structure 201 includes a 24-bit color pixel. Suppose the color depth of the pixel is compressed to 8-bit (3-bit, 3-bit and 2-bit for R, G and B respectively) in the low power work mode, the physical structure of the pixel bits can be re-organized as 202, in which the MSD and the LSD can be implemented, for example, in different memory banks. Therefore the shut down of the LSD can be achieved. Different to the conventional dynamic-color-depth control technique, an embodiment of the method adds a simplified error diffusion module (Error Diffusion Encoder) in a display driver, display controller, and/or equivalent hardware modules (e.g., software, hardware, or a combination of both) to remove the image artifacts caused by the reduced color depth.

[0026] The Error Diffusion Encoder can be implemented in a display driver and/or application software, for example, running within a processor or controller (e.g., firmware, DSP or a CPU, etc.) The modified display data is fed into the MSD when the LSD is shut down or the power of the LSD is reduced.

[0027] Figure 3 is a block diagram illustrating a display sub-system according to one embodiment of the invention. In one embodiment, display system 300 includes, but is not limited to, an error diffusion encoder 301 coupled to a frame buffer 302 and a display controller 303 which is coupled to a display device 304, such as, for example

LCD or OLED display panel. In this embodiment, an error diffusion encoder 301 may be implemented as a software encoder, which may be implemented as an application, device driver, and/or firmware. Frame buffer 302 may be a specifically allocated memory from a main memory (not shown). Alternatively, frame buffer 302 may be a dedicated memory within a chipset (e.g., memory controller, not shown) or a display controller 303. Furthermore, frame buffer 302 may be a dedicated standalone memory chipset in the display subsystem. The display controller 303 may be implemented within a chipset or a standalone display controller (e.g., PCI (peripheral component interconnect), PCI-Express or AGP (accelerated graphic port) compatible controller). In one embodiment, software diffusion encoder 301 processes the display data and stores the processed display data in the frame buffer 302. Thereafter, the display controller 303 fetches the data from the frame buffer and sends the display data to the display device 304 for display.

[0028] Referring to Figure 3, according to one embodiment, the display sub-system 300 provides two display modes: 1) the normal work mode or a tint powermode, and 2) the low power work mode. In the normal work mode, the original display data is directly fed into the frame buffer with bit order similar to bit order 202 of Figure 2 without any change. The display controller 303, controlled by software (e.g., including error diffusion encoder 301), may choose path (1) to access the full frame buffer for the display panel refreshing. While in the low power work mode, the software Error Diffusion Encoder 301 translates the original image to pixels with reduced color depth that fits with the size and organization of the MSD without generating false contour artifacts, and then writes the result data into the MSD of the frame buffer 302. When the display controller 303 refreshes the display device 304, it just fetches the data out from MSD of the frame buffer 302 through path (2) and feeds the data to the display device 304, and considers the data of least significant bits as zero or a predetermined value.

[0029] In the low power work mode, only the MSD of the frame buffer and the associated logics are powered, all other parts (e.g., LSD of the frame buffer) can be powered down. According to one embodiment, a color image with 24-bit or 16-bit color depth can be converted to 9-bit (e.g., 3 bits for each color) or 8-bit (e.g., 3 bits for R and G, 2 bits for B) without obvious artifacts. Therefore this embodiment is able to shut down approximately 43%~66% of the frame buffer to save approximately 43%~66% of the power consumption of the display sub-system. This embodiment is typically useful for those applications where the image content changes relatively slowly, such as, for example, those applications including e-book, image/text editor, web browser, etc.

[0030] Figure 4 is a block diagram illustrating a display sub-system according to another embodiment of the invention. In this embodiment, an Error Diffusion Encoder may be implemented in hardware. For example, the error diffusion encoder may be implemented as part of a display controller and/or a chipset. In one embodiment, display system 400 includes, but is not limited to, an error diffusion encoder 401 implemented within a display controller 403 which is coupled to one or more frame buffers 402 and a display device 404, such as, LCD or OLED display panel. Frame buffer 402 may be a specifically allocated memory from a main memory (not shown). Alternatively, frame buffer 402 may be a dedicated memory within a chipset (e.g., memory controller, not shown) or a display controller 403. Furthermore, frame buffer 402 may be a dedicated standalone memory chipset in the display subsystem. The display controller 403 may be implemented within a chip set or a standalone display controller (e.g., PCI, PCI-Express or AGP compatible controller). In one embodiment, error diffusion encoder 401 processes the display data and stores the processed display data in the frame buffer 402. Thereafter, the display controller 403 fetches the data from the frame buffer 402 and sends the display data to the display device 404 for display.

[0031] Figure 4 illustrates an example of a display controller implementation, in which a hardware module performs the error diffusion algorithm in addition to the re-organization of the frame buffer bits. In a normal work mode, referring to Figure 4, the data stream follows the path (1), through which the original image data are written into both MSD and LSD of the frame buffer 402, and are fully accessible for display panel refreshing. In the low power work mode, the data stream follows path (2). The Error Diffusion Encoder 401 translates the original image to pixels with reduced color depth that fits with the size and organization of the MSD without generating false contour artifacts, then writes the result data into MSD. In the low power mode, the power to the LSD may be removed or reduced.

[0032] When the display controller 403 refreshes the display device 404, the display controller 403 just fetches out the data from MSD through path (2) and considers the data of least significant bits as zero or a predetermined value. Apparently, in this case, the same portion of the frame buffer memory (e.g., the LSD) and the associated bus lines can be powered down. In this embodiment, the hardware simulation results show the power consumption of the Error Diffusion Encoder is potentially as low as 0.05% of the frame buffer memory, which may be neglected when calculating the power saving of the system. Therefore approximately 43%~66% of the power consumption of the frame buffer and the associated logic can be reduced in this embodiment. This embodiment is typically useful for all kinds of applications, such as text viewer, image viewer, movie player and so on.

[0033] According to a further embodiment, multiple frame buffers or frame buffer sections may be used. Figure 5 is a block diagram illustrating a display sub-system according to another embodiment of the invention. In this embodiment, multiple frame buffers or frame buffer sections are implemented. In one embodiment, display system 500 includes, but is not limited to, an error diffusion encoder 501 implemented

within a display controller 503 which is coupled to multiple frame buffers 502A-502B and a display device 504, such as, LCD or OLED display panel.

[0034] Frame buffers 502A and 502B may be a specifically allocated memory from a main memory (not shown). Alternatively, frame buffers 502A and 502B may be a dedicated memory within a chipset (e.g., memory controller, not shown) or a display controller 503. Furthermore, frame buffer 502A and 502B may be a dedicated standalone memory chipset in the display subsystem. In a particular embodiment, frame buffers 502A and 502B may be individually powered up and down. The display controller 503 may be implemented within a chipset or a standalone display controller (e.g., PCI, PCI-Express or AGP compatible controller). In one embodiment, error diffusion encoder 501 processes the display data and stores the processed display data in the frame buffers 502A and 502B. Thereafter, the display controller 503 fetches the data from the frame buffers 502A and 502B, and sends the display data to the display device 504 for display.

[0035] Referring to Figure 5, in one embodiment, the Uncompressed Frame Buffer (UFB) 502A is used to store the original image pixels during a normal power mode (also referred to as a first power state), while an additional Compressed Frame Buffer (CFB) 502B is used to store the result image with low bit depth for the low power work mode. The UFB 502A has both MSD and LSD that may be organized in traditional bit order 201 or proposed bit order 202 shown in Figure 2. The CFB 502B only has MSD with similar size as the MSD in the configuration shown in Figure 4. In the normal work mode, according to one embodiment, the image data are written into the UFB 502A, and then read out through the path (1) for display panel refreshing.

[0036] While in low power work mode (also referred to as a low power state or a second power state), the Error Diffusion Encoder 501 translates the original image to pixels with a lower color depth that fits with the size and organization of the CFB without generating false contour artifacts, then writes the result data into the CFB

502B. Meanwhile, the original image data are also written into the UFB 502A for future read-back. When the display controller 503 refreshes the display device 504, it just reads out the data from CFB 502B through path (2) and considers the data of least significant bits as zero or a predetermined value.

[0037] This embodiment provides a transparent interface to the host system in both frame buffer read and write. In this example, the low power work mode may consume more energy than the normal work mode in the frame buffer writing, since the Error Diffusion Encoder 501 and the CFB 502B consumes additional energy. But the display device refreshing consumes less power due to smaller size of CFB 502B and associated logics. As a result, this embodiment is typically useful for those applications where the image content changes very slowly. Such sample applications include e-book, image/text editor, web browser, etc.

[0038] Although the above hardware Error Diffusion Encoders are embedded in display controllers, in some recent handheld architectures, such as OMAP™ 2 and Intel® PXA27X, part of the main memory may be allocated or mapped as a display frame buffer, and the data write is controlled by the memory controller and/or equivalent modules. In this case the Error Diffusion Encoder can be embedded in the memory controller or equivalent modules (e.g., chipset), besides some additional features such as the work mode switcher in the display controller.

[0039] In addition, according to one embodiment, an algorithm may be implemented within an error diffusion encoder for a color plane. As for color images with 3 color planes, the algorithm is similar for each plane. In one embodiment, an error diffusion algorithm is performed on each image pixel, in sequential order, starting from the top left pixel and proceeding from left to right to the bottom of the image. Alternatively, multiple encoders may be employed to process multiple color planes.

[0040] Figure 6 is a flow diagram illustrating an example of a process for error diffusion according to one embodiment. Process 600 may be performed by a processing logic that may include hardware (circuitry, dedicated logic, etc.), software (such as is run on a general purpose computer system or a dedicated machine), or a combination of both. For example, process 600 may be performed by a display sub-system as shown in Figures 3-5.

[0041] Referring to Figure 6A, at block 602, during a low power state, such as a low or reduced power state, an error diffusion operation is performed on the pixels to reduce a color depth of the pixels. At block 604, at least a portion of the pixels with reduced color depth is stored in a first segment of the frame buffer without accessing (e.g., writing or reading) the second segment of the frame buffer. As a result, during the low power state, the power to the second segment of the frame buffer may be reduced or shut off to save power. Other operations may also be performed. Note that a device can operate in the normal power state and the low power state independently and can switch from either power state to the other, for example, by hardware, software, or a combination of both at any time. Thus, one power state does not necessarily depend from the other power state or vice versa.

[0042] Figure 6B is a flow diagram illustrating an example of a process for error diffusion according to one embodiment. Process 650 may be performed by a processing logic that may include hardware (circuitry, dedicated logic, etc.), software (such as is run on a general purpose computer system or a dedicated machine), or a combination of both. For example, process 650 may be performed by a display sub-system as shown in Figures 3-5, particularly, as a part of operations involved in block 602 of Figure 6A.

[0043] Referring to Figure 6B, at block 652, for each pixel, an output value is calculated according to a source pixel value. In a particular embodiment, the output pixel value may include 2 to 3 most significant bits of the source pixel value. At block

654, the error between the source pixel value and the output pixel value is calculated. At block 656, the error may be diffused to the neighboring pixels (e.g., more than 4 pixels), including for example, updating the value of each neighboring pixel by adding a weighted error. The pattern in diffusing the error is also referred to as an error filter. Other operations may also be performed.

[0044] Typically, the classical error diffusion is a 2-dimensional-convolution-like algorithm with high computational complexity and intensively memory buffer accessing. For example, in a conventional algorithm, each pixel needs at least 8 times of memory accesses for diffusing the error to the 4 neighboring pixels. It also needs a memory buffer sized of two image rows to temporarily store the diffused error data. These cause a high cost and high power consumption of the Error Diffusion Encoder itself, which is unacceptable in a lower power technique for a portable device, such as a handheld device.

[0045] Accordingly, according to one embodiment, a simplified error diffusion algorithm is designed to solve this problem, which includes 2-Neighborhood Error Filter and Error-Bit-Reduction. In one embodiment, in a 2-Neighborhood Error Filter a 2-neighborhood error filter is utilized instead of the classical error filters, as shown below:

×	1/2
1/2	

[0046] As shown above, when the pixel X is processed, according to one embodiment, the error between the output color and the original color of X is only diffused into the right and bottom pixels, and the weight coefficients are set to 1/2 for isotropic diffusion and implementation convenience. Because the neighborhood pixels are reduced to 2, only one buffer sized of one image row is required to store the error diffused to the bottom pixel, and the error diffused to the right pixel can be temporarily stored in a register.

[0047] Note that although the above processes are performed from top to bottom and from left to right, if the image accessing order is different (e.g. from bottom left to top right), the neighboring pixel may be right and upper ones according to certain embodiments of the invention.

[0048] Figure 7 shows the pseudo-code of an example process where the color depth is reduced from 8 bits to 3 bits. For example, the pseudo code may be performed by an error diffusion encoder described above. Referring to Figure 7, in lines 5-6, the original pixel value in X and the weighted error diffused from the left and top pixels of X are summed and temporarily stored in a register temp_sum. In line 7, the output pixel value is calculated by cutting off the lower 5 bits (set to zero) of temp_sum, and is written into the frame buffer (e.g., FrameBuffer[x]). In line 8, the error between the modified original pixel and the output pixel, which is just the lower 5 bits of temp_sum, is calculated. In lines 9 and 10 the error is divided by 2 and stored in the buffer (e.g., buffer[x]) and the register (register) for the bottom pixel and right pixel respectively. Apparently, if we just consider the additional computation compared with image copy, the complexity for each pixel is roughly 2 times of ADD, 2 times of AND, 2 times of SHIFTING and one Conditional Evaluation operations. The additional memory access is also reduced to 2 times (e.g., read and write buffer[x] in lines 5 and 10).

[0049] In addition, according to one embodiment, besides the 2-neighborhood error filter, in hardware implementation, the error diffusion algorithm may be further simplified to reduce the buffer memory access that consumes most of the energy of the Error Diffusion Encoder. For example, suppose the 8-bit color depth being reduced to 3-bit, the bit number of error is 5, and is 4 after multiplying the weight coefficient of 1/2. The lower 3 bits may be cut down or truncated and only the higher 2 bits are reserved as the error data diffused to the right and bottom pixels. As a result, the memory access counted by bit is reduced.

[0050] Moreover, since the memory requirement is small (as for a 640x480 display, only 640x2 bits or 160 bytes are required for each color plane), the memory buffer can be cost-effectively realized by SRAM (static random access memory) that consumes much less energy than DRAM (dynamic RAM).

[0051] Figure 8 is a flow diagram illustrating an example of a process of the error diffusion algorithm with a 2-neighborhood error filter and error-bit-reduction according to one embodiment. Note that the variable temp_sum here is just a symbol to illustrate the algorithm and is not the physical register or memory, temp_sum[7:5] denotes the data lines of bits 5, 6 and 7, and temp_sum[4:3] denotes the data lines of bits 3 and 4.

[0052] Compared with the software implementation, the hardware solution has less complexity and is more energy-efficient, because: (1) it is easy to make the register and buffer support 2-bit data access in hardware implementation, which is relatively difficult in software solution; (2) it does not need the temporary register and the SHIFTING operation unit in the hardware implementation. Instead, these two functions can be implemented by appropriately connecting the data lines. As a result, the hardware Error Diffusion Encoder only needs 2 times of 2-bit memory access and 2 times of 2-bit register access for each pixel, which consumes much less energy.

[0053] The above illustration is based on images with one color plane. As for color images (e.g. 24-bit true color image, 16-bit color image, etc.), the RGB sub-pixel data can be fed into the display system sub-pixel by sub-pixel or color plane by color plane in different display system configurations. For the former case, 3 copies of the Error Diffusion Encoder may be used to process the R, G and B sub-pixels independently. For the later case, one copy of the encoder may be used to process the R, G and B color plane sequentially. Other configurations may exist.

[0054] In a particular embodiment, an Error Diffusion Encoder is implemented in an XC3S400-FG320 of Xilinx Spartan series FPGA. According to one embodiment,

the hardware pseudo-code for one color plane is shown in Figure 9, in which the input 8-bit pixel data is encoded to 3-bit data.

[0055] As for the true color image with 3 color planes, a 24-bit image is fed into a frame buffer pixel by pixel, in which each pixel includes the B, G and R color data with 8 bits respectively. In this case, three copies of the Error Diffusion Encoders and the corresponding intern buffers are utilized. A block RAM in FPGA (defined in constrain file) is used to implement internal memory buffer to store the diffused error in one scan line. Block RAMs are dedicated blocks of true dual-port RAM. This kind of implementation saves power than FPGA's logic resources. The implemented frame rate is approximately 30frame/second and the image size is 640x480 pixels. For the encoder core logic, only 3840 bits of block RAMs, 379 slices and 154 slice flip-flops, which have an equivalent gate count of 32,723 (including block RAMs) gates, are used.

[0056] Real image data is used for FPGA simulation to verify the proposed hardware Error Diffusion Encoder. The original image is 24-bit true color, after the Error Diffusion Encoder, the color depth is reduced to 9 bits with 3:3:3 for RGB. The simulation results show the hardware Error Diffusion Encoder outputs the same images as in the software experiments described above.

[0057] Due to the Error Diffusion Encoder is integrated in the LCD controller, the core logic of the additional encoder is useful for the power budget, thus the I/O part is not included. The error diffusion encoder core logic only consumes approximately 2.4mW of power. By using one or more techniques described above, approximately 5/8 of frame buffer storage room can be saved and their power can be reduced or shut down. But consider that practical SDRAM frame buffer are 4, 8 or 16 bits wide, about 1/2 power can be saved for 4 bits wide frame buffer. For 16Mbit frame buffer, about 8Mbit's power consumption, can be saved. For example, if 16Mbit SDRAM from

Samsung, K4S161622E is used for frame buffer, its power consumption is 462mW at operating mode and 231mW power can be saved.

[0058] For equivalent capability, FPGA will consume about 20 times of power as that of an ASIC. If the error diffusion encoder is integrated directly into LCD controller by the ASIC, the power consumption will be reduced to 0.12mW. At average, for 16Mbit SDRAM K4S161622E, one bit will consume about 2.88×10^{-5} mW. The power of hardware error diffusion can be converted to about 4155 bits' power consumption in 16Mbit SDRAM. For the error diffusion encoder described above, 8Mbits of frame buffer's power can be saved at the expenses of 4kbits power, the expenses is about 0.05% of saved frame buffer power.

[0059] Reducing pixel bit number from 24-bit to 9-bit by our proposed hardware Error Diffusion Encoder solution, we can not only save the power of frame buffer but also the 5/8 of power of frame buffer data bus and LCD panel bus. Based on the energy portion of conventional system component of hand-held embedded system, we can estimate the portion of total power saved by hardware error diffusion encoder (Due to the additional encoder power is only about 0.05% of saved frame buffer power, it's neglected in the estimation). The LCD panel bus is the type with 4-bit additional sync/control signal. The data is shown in table below. From the table below, we can see that about 10.57% of whole hand-held embedded system power can be saved by our proposed hardware Error Diffusion Encoder.

Component	Display memory device	Display memory data bus	LCD Panel bus	LCD Controller
Power portion (%) without encoder	13.2	3.2	5.8	3.4
Power portion (%) with encoder	6.6	1.2	3.38	3.4
Saved portion (%)	6.6	2	2.42	0
Total saved portion (%)	10.57			

We only calculated the saved power portion for handheld devices with independent frame buffer chips. For that architecture with part of main memory mapped for display frame buffer, with hardware Error Diffusion Encoder Solution, the saved power on display memory data bus and LCD panel bus still remain.

[0060] Above are the implementation and analysis on encoding 24-bit color images to 9-bit ones. The hardware design is similar in dealing with the encoding from 24-bit images to 8-bit ones, from 16-bit images to 8-bit, from 16-bit to 9-bit, etc. Note that the above described techniques are applied to a color plane for the purposes of illustration. It is not so limited. It will be appreciated that the above described techniques may also be applied to grey scale image planes, where the grey scale image planes may be considered as a special kind of color planes.

[0061] Figure 10 is a block diagram of an example computer system that may use an embodiment of a display sub-system having at least one of the features described above, such as, for example, an error diffusion encoder as described above. In one embodiment, computer system 1000 includes a communication mechanism, interconnect, and/or bus 1011 for communicating information, and an integrated circuit component such as a main processing unit 1012 coupled with bus or interconnect 1011 for processing information. The main processing unit 1012 may include one or more processors or processing core logic working together as a unit.

[0062] Computer system 1000 further includes a random access memory (RAM) or other dynamic storage device 1004 (also referred to as a main memory) coupled to bus or interconnect 1011 for storing information and instructions to be executed by main processing unit 1012. Main memory 1004 may also be used for storing temporary variables or other intermediate information during execution of instructions by main processing unit 1012.

[0063] Firmware 1003 may be a combination of software and hardware, such as Electronically Programmable Read-Only Memory (EPROM) that has the operations

for the routine recorded on the EPROM. The firmware 1003 may embed foundation code, basic input/output system code (BIOS), or other similar code. The firmware 1003 may make it possible for the computer system 1000 to boot itself.

[0064] Computer system 1000 may also include a read-only memory (ROM) and/or other static storage device 1006 coupled to bus or interconnect 1011 for storing static information and instructions for main processing unit 1012. The static storage device 1006 may store OS (operating system) level, also referred to system level, and application level software. Computer system 1000 may further be coupled to a display device 1021, such as a cathode ray tube (CRT) or liquid crystal display (LCD), coupled to bus 1011 for displaying information to a computer user. A chipset may interface with the display device 1021.

[0065] An alphanumeric input device (keyboard) 1022, including alphanumeric and other keys, may also be coupled to bus 1011 for communicating information and command selections to main processing unit 1012. An additional user input device is cursor control device 1023, such as a mouse, trackball, trackpad, stylus, or cursor direction keys, coupled to bus 1011 for communicating direction information and command selections to main processing unit 1012, and for controlling cursor movement on a display device 1021. A chipset may interface with the input output devices.

[0066] Another device that may be coupled to bus 1011 is a hard copy device 1024, which may be used for printing instructions, data, or other information on a medium such as paper, film, or similar types of media. Furthermore, a sound recording and playback device, such as a speaker and/or microphone (not shown) may optionally be coupled to bus 1011 for audio interfacing with computer system 1000. Another device that may be coupled to bus 1011 is a wired/wireless communication capability 1025. Further, according to one embodiment, system 1000 includes an image capturing device 1030, such as, for example, a digital camera, a video camera,

and/or a scanner, etc. The image capturing device 1030 may capture a stream of images and system 1000 may process the captured images using one or more techniques described above.

[0067] According to one embodiment, an error diffusion encoder having one or more of the algorithms described above may be implemented within system 1000. For example, an error diffusion encoder may be implemented as application software, which may be stored in non-volatile memory 1006 and executed from main memory 1004 to process display data in one or more frame buffers and display the data in display device 1021. Alternatively, the error diffusion encoder may be implemented in firmware 1003 or a device driver (e.g., a display driver). Further, the error diffusion encoder may be implemented in hardware, such as, for example, a display controller, which may be implemented within chipset 1036 and/or processor 1012. The one or more frame buffers may be specifically allocated from memory 1004. Alternatively, the one or more frame buffers may be implemented as separate dedicated memory within the hardware and/or firmware, such as, for example, chipset 1036 and/or firmware 1003, or a combination of the above configurations. Other components may also be included.

[0068] Thus, methods and apparatuses for error diffusion for display frame buffer power saving have been described herein. Some portions of the preceding detailed descriptions have been presented in terms of algorithms and symbolic representations of operations on data bits within a computer memory. These algorithmic descriptions and representations are the ways used by those skilled in the data processing arts to most effectively convey the substance of their work to others skilled in the art. An algorithm is here, and generally, conceived to be a self-consistent sequence of operations leading to a desired result. The operations are those requiring physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred,

combined, compared, and otherwise manipulated. It has proven convenient at times, principally for reasons of common usage, to refer to these signals as bits, values, elements, symbols, characters, terms, numbers, or the like.

[0069] It should be borne in mind, however, that all of these and similar terms are to be associated with the appropriate physical quantities and are merely convenient labels applied to these quantities. Unless specifically stated otherwise as apparent from the above discussion, it is appreciated that throughout the description, discussions utilizing terms such as "processing" or "computing" or "calculating" or "determining" or "displaying" or the like, refer to the action and processes of a computer system, or similar electronic computing device, that manipulates and transforms data represented as physical (electronic) quantities within the computer system's registers and memories into other data similarly represented as physical quantities within the computer system memories or registers or other such information storage, transmission or display devices.

[0070] Embodiments of the present invention also relate to an apparatus for performing the operations herein. This apparatus may be specially constructed for the required purposes, or it may comprise a general-purpose computer selectively activated or reconfigured by a computer program stored in the computer. Such a computer program may be stored in a computer readable storage medium, such as, but is not limited to, any type of disk including floppy disks, optical disks, CD-ROMs, and magnetic-optical disks, read-only memories (ROMs), random access memories (RAMs), erasable programmable ROMs (EPROMs), electrically erasable programmable ROMs (EEPROMs), magnetic or optical cards, or any type of media suitable for storing electronic instructions, and each coupled to a computer system bus.

[0071] The algorithms and displays presented herein are not inherently related to any particular computer or other apparatus. Various general-purpose systems may be

used with programs in accordance with the teachings herein, or it may prove convenient to construct more specialized apparatus to perform the required method operations. The required structure for a variety of these systems will appear from the description below. In addition, embodiments of the present invention are not described with reference to any particular programming language. It will be appreciated that a variety of programming languages may be used to implement the teachings of embodiments of the invention as described herein.

[0072] A machine-readable medium may include any mechanism for storing or transmitting information in a form readable by a machine (e.g., a computer). For example, a machine-readable medium includes read only memory ("ROM"); random access memory ("RAM"); magnetic disk storage media; optical storage media; flash memory devices; electrical, optical, acoustical or other form of propagated signals (e.g., carrier waves, infrared signals, digital signals, etc.); etc.

[0073] In the foregoing specification, embodiments of the invention have been described with reference to specific exemplary embodiments thereof. It will be evident that various modifications may be made thereto without departing from the broader spirit and scope of embodiments of the invention as set forth in the following claims. The specification and drawings are, accordingly, to be regarded in an illustrative sense rather than a restrictive sense.

CLAIMS

What is claimed is:

1. A computer implemented method, comprising:
in a normal power state, directly storing pixels of a color plane of image data in
a first segment and a second segment of a frame buffer;
in a low power state, performing an error diffusion operation on the pixels to
reduce a color depth of the pixels, the normal and low power states are
independent and switchable from each other; and
storing at least a portion of the pixels with reduced color depth in the first
segment of the frame buffer without accessing the second segment of
the frame buffer during the low power state.
2. The method of claim 1, further comprising reducing power to the second
segment of the frame buffer during the low power state.
3. The method of claim 1, further comprising:
during the normal power state, fetching the pixels from the first and second
segments of the frame buffer for display; and
during the low power state, fetching the pixels with reduced color depth from
the first segment of the frame buffer for display without accessing the
second segment of the frame buffer.
4. The method of claim 3, wherein the first segment is a most significant device
(MSD) of the frame buffer and the second segment is a least significant device (LSD)
of the frame buffer.



5. The method of claim 4, wherein during the low power state, pixels with reduced color depth are used as data associated with the MSD for display while a predetermined value is used as data associated with the LSD for display without accessing the LSD of the frame buffer.
6. The method of claim 1, wherein performing an error diffusion operation on the pixels comprises:
 - for each source pixel of each color plane of the image data, calculating an output value corresponding to a source pixel value of the source pixel according to a predetermined algorithm;
 - calculating an error between the output value and the source pixel value; and
 - diffusing the error to up to two neighboring pixels of the source pixel.
7. The method of claim 6, wherein the up to two neighboring pixels are a right pixel and a bottom pixel of the source pixel.
8. The method of claim 6, wherein diffusing the error to up to two neighboring pixels comprises adjusting pixel values of the up to two neighboring pixels with at least a portion of the error, wherein the portion of the error diffused to the neighboring pixel in an identical row is temporarily stored in a register and a portion of the error diffused to the neighboring pixel in a next row is temporarily stored in a line buffer.
9. The method of claim 6, further comprising reducing color bits of each pixel with reduced color depth to fit within the first segment of the frame buffer prior to storing each pixel in the first segment of the frame buffer.

10. The method of claim 9, wherein reducing color bits of each pixel with reduced color depth comprises:

for each pixel of a color plane, arithmetically adding the error diffused from up to two neighboring pixels to an original value of a pixel, and storing a predetermined number of most significant bits (MSBs) of the output value in the first segment of the frame buffer.

11. The method of claim 1, wherein the error diffusion operation is performed by an encoder implemented within at least one of software, a display controller, and a chipset of a data processing system.

12. A machine-readable medium for storing instructions, when executed by a machine, cause the machine to perform a method, the method comprising:

in a normal power state, directly storing pixels of a color plane of image data in a first segment and a second segment of a frame buffer;
in a low power state, performing an error diffusion operation on the pixels to reduce a color depth of the pixels, the normal and low power states being independent and switchable from each other; and
storing at least a portion of the pixels with reduced color depth in the first segment of the frame buffer during the low power state without accessing the second segment of the frame buffer.

13. The machine-readable medium of claim 12, wherein performing an error diffusion operation on the pixels comprises:

for each source pixel of each color plane of the image data, calculating an output value corresponding to a source pixel value of the source pixel according to a predetermined algorithm;

calculating an error between the output value and the source pixel value; and
diffusing the error to up to two neighboring pixels of the source pixel.

14. The machine-readable medium of claim 13, wherein the method further comprises reducing color bits of each pixel with reduced color depth to fit within the first segment of the frame buffer prior to storing each pixel in the first segment of the frame buffer, including

for each pixel of a color plane, arithmetically adding the error diffused from up to two neighboring pixels to an original value of a pixel, and
storing a predetermined number of most significant bits (MSBs) of the output value in the first segment of the frame buffer.

15. A data processing system, comprising:

a display subsystem including

a frame buffer having a first segment and a second segment,
an encoder coupled to the frame buffer and configured to
store pixels of a color plane of image data in the first and second
segments of the frame buffer during a normal power state,
perform an error diffusion operation on the pixels to reduce a color
depth of the pixels during a low power state, the normal and
low power states being independent and switchable from each
other, and

store at least a portion of the pixels with reduced color depth in the first
segment of the frame buffer during the low power state without
accessing the second segment of the frame buffer.

16. The system of claim 15, wherein during performing an error diffusion operation on the pixels, the encoder is further configured to:
- for each source pixel of each color plane of the image data, calculate an output value corresponding to a source pixel value of the source pixel according to a predetermined algorithm,
 - calculate an error between the output value and the source pixel value, and
 - diffuse the error to up to two neighboring pixels of the source pixel.
17. The system of claim 16, wherein the encoder is further configured to reduce color bits of each pixel with reduced color depth to fit within the first segment of the frame buffer prior to storing each pixel in the first segment of the frame buffer, including
- for each pixel of a color plane, arithmetically adding the error diffused from up to two neighboring pixels to an original value of a pixel, and
 - storing a predetermined number of most significant bits (MSBs) of the output value in the first segment of the frame buffer.
18. A computer implemented method, comprising:
- during a low power state of a frame buffer having a first segment and a second segment, for each source pixel of each color plane of image data,
 - calculating an output value corresponding to a source pixel value of the source pixel according to a predetermined algorithm;
 - calculating an error between the output value and the source pixel value;
 - diffusing the error to up to two neighboring pixels of the source pixel; and
 - storing the output value of the source pixel and the diffused up to two neighboring pixels to the first segment of the frame buffer without

accessing the second segment of the frame buffer during the low power state of the frame buffer.

19. The method of claim 18, further comprising reducing color bits of each output value and the up to two neighboring pixels to fit within the first segment of the frame buffer before being stored in the first segment of the frame buffer.

20. The method of claim 19, wherein reducing color bits comprises:
for each pixel of a color plane, arithmetically adding the error diffused from up to two neighboring pixels to an original value of a pixel, and
storing a predetermined number of most significant bits (MSBs) of the output value in the first segment of the frame buffer.

ABSTRACT OF THE DISCLOSURE

Methods and apparatuses for error diffusion for display frame buffer power saving are described herein. According to one embodiment, pixels of a color plane of image data are stored in a first segment and a second segment of a frame buffer during a normal power state. During a low power state, an error diffusion operation is performed on the pixels to reduce a color depth of the pixels. Thereafter, at least a portion of the pixels with reduced color depth is stored in the first segment of the frame buffer during the low power state without accessing the second segment of the frame buffer. Other methods and apparatuses are also described.

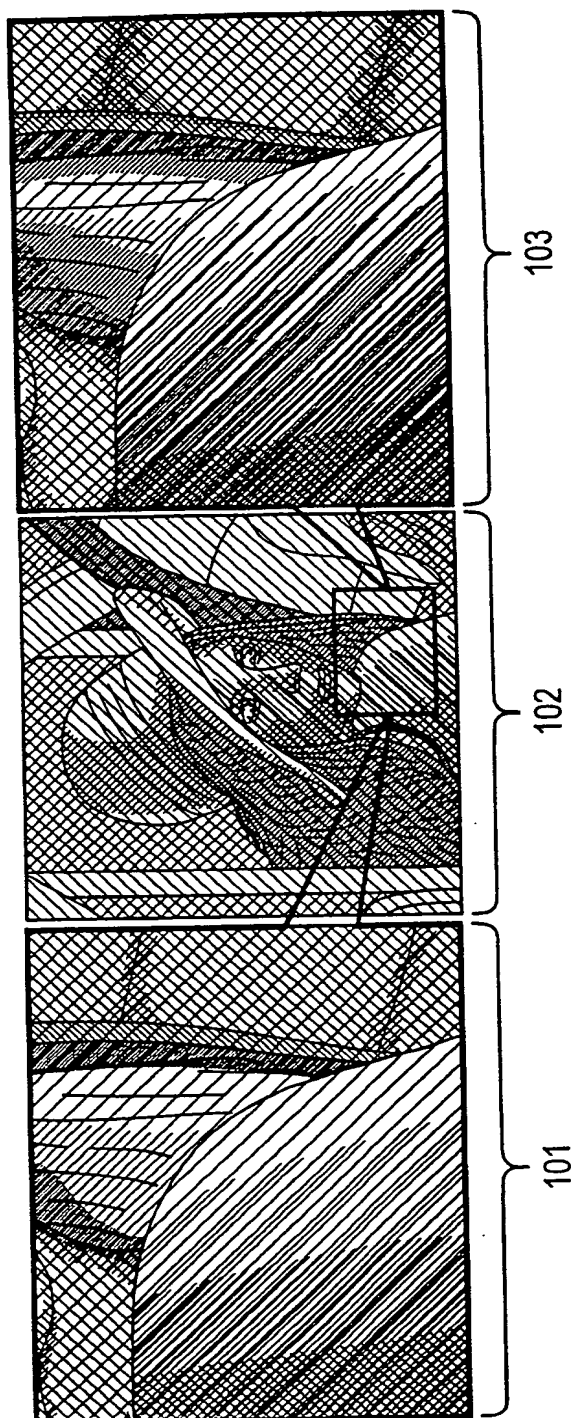


FIG. 1

201

R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Most Significant Device (MSD)								Least Significant Device (LSD)															

202

R7	R6	R5	R4	R3	R2	R1	R0	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Most Significant Device (MSD)								Least Significant Device (LSD)										

Fig. 2

3/11

300

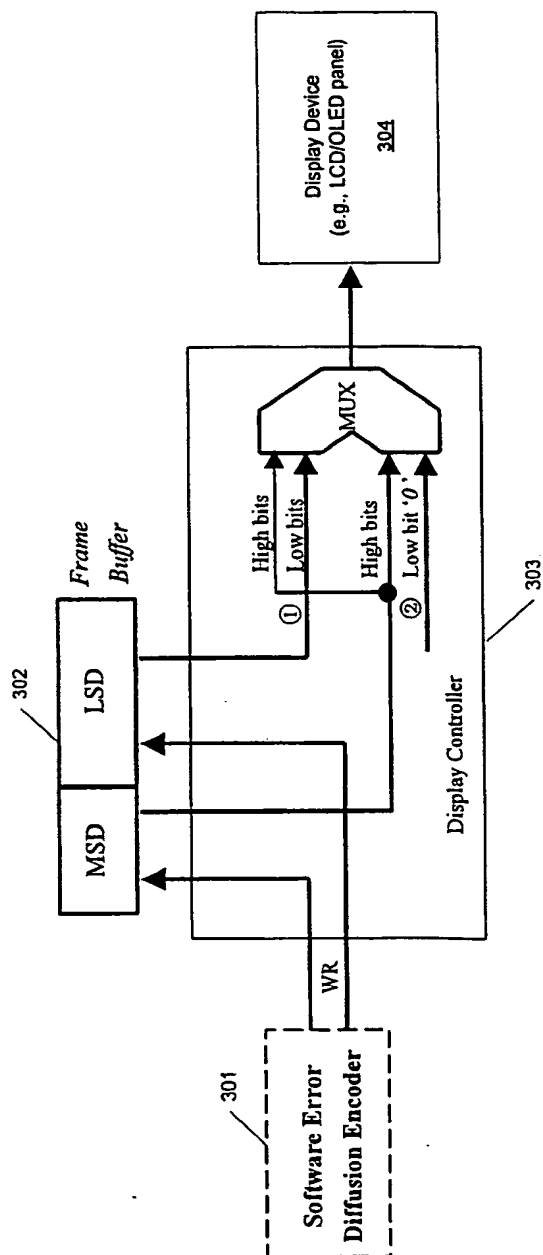


Fig. 3

400

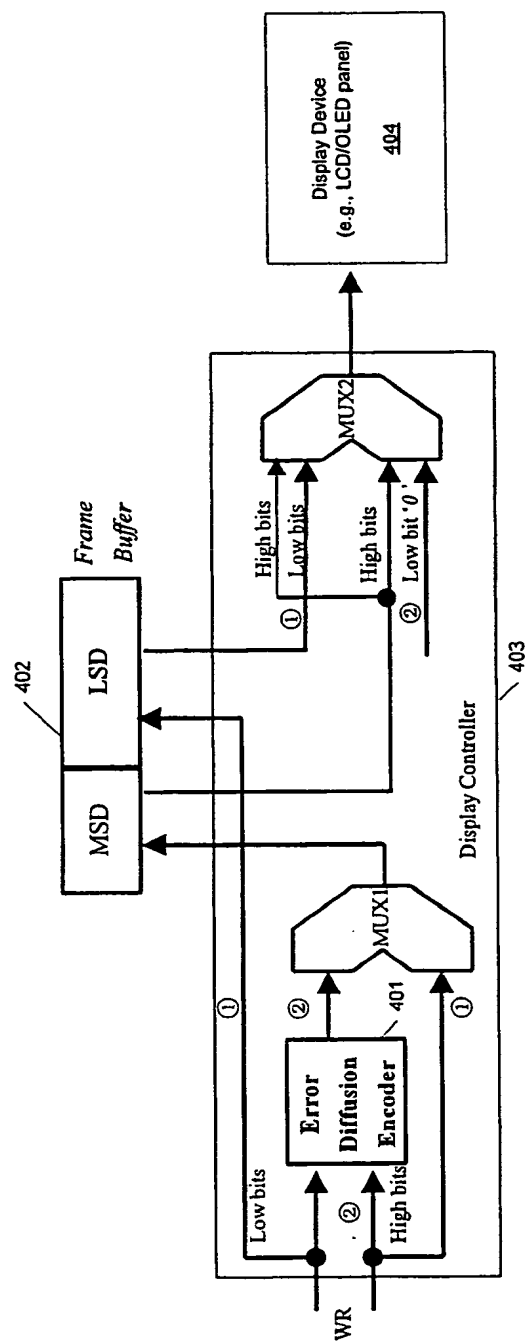


Fig. 4

5/11

500

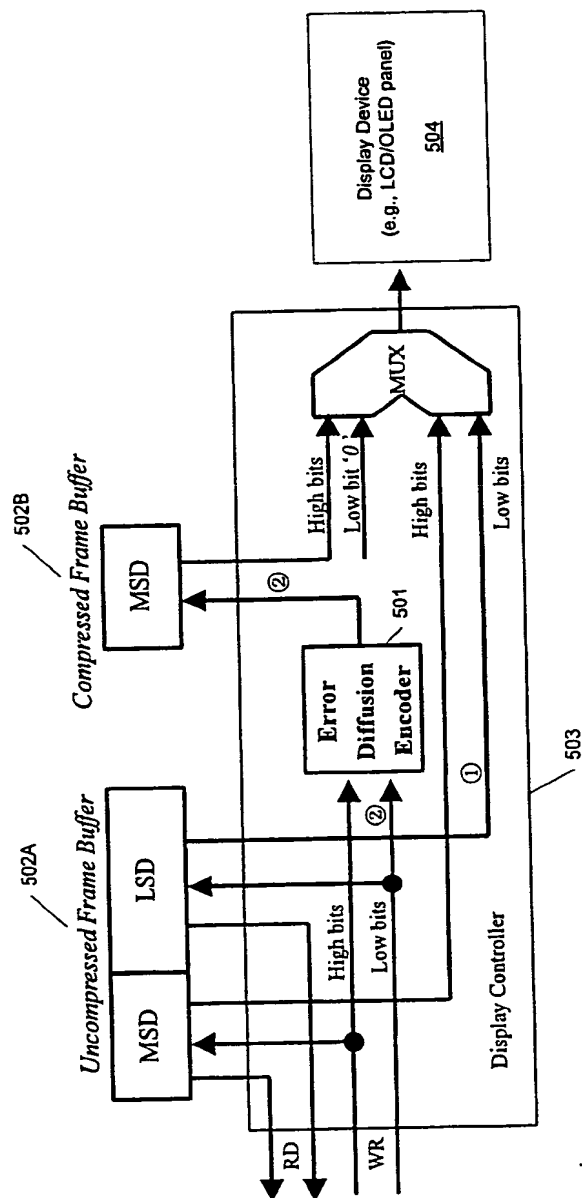


Fig. 5

6/11

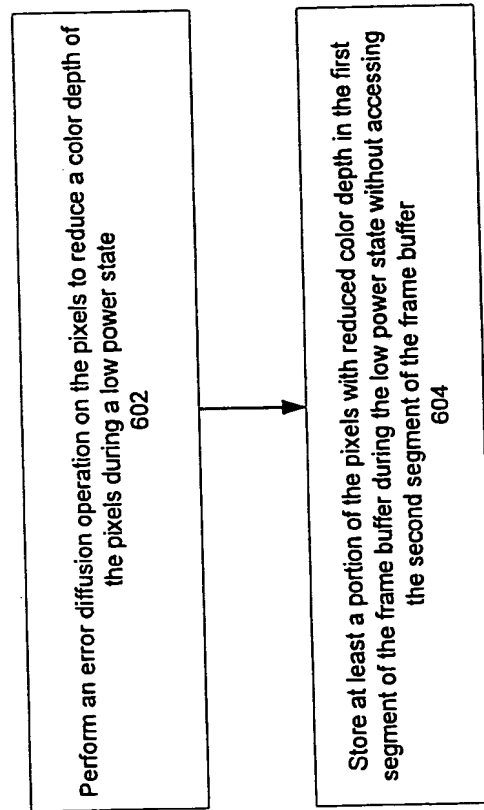
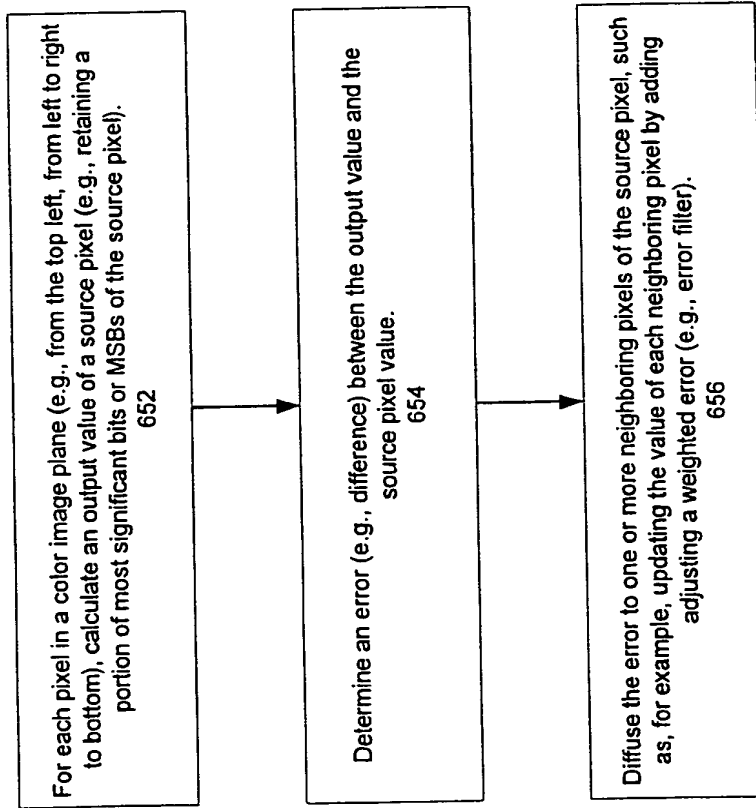
600

Fig. 6A

650**Fig. 6B**

Notation	
<i>buffer</i> []	Memory buffer sized of one image row to store the error diffused to the bottom pixels
<i>register</i>	Register to store the error diffused to the right pixel
<i>FrameBuffer</i> []	Frame buffer to store the result image pixel, the addressing between scan lines is omitted
<i>SrcImage</i> []	Original image data, the addressing between scan lines is omitted
<i>temp_sum</i> ,	Temporary buffer, can be implemented by register
<i>temp-error</i>	
Algorithm	
1. Set all the cells in <i>buffer</i> [] to 0	
2. For each row in the image	
3. Set <i>register</i> to 0	
4. For each pixel position <i>x</i> in one row	
5. <i>temp_sum</i> = <i>SrcImage</i> [<i>x</i>] + <i>register</i> + <i>buffer</i> [<i>x</i>]	(update the current image pixel value)
6. if (overflow in sum operation) <i>temp_sum</i> = 255	(quantizing to get output pixel value)
7. <i>FrameBuffer</i> [<i>x</i>] = <i>temp_sum</i> & 0xe0	(calculate error)
8. <i>temp_error</i> = <i>temp_sum</i> & 0x1f	(diffuse error to the right pixel)
9. <i>register</i> = <i>temp_error</i> >> 1	(diffuse error to the bottom pixel)
10. <i>buffer</i> [<i>x</i>] = <i>temp_error</i> >> 1	
11. End of For	
12. End of For	

Fig. 7

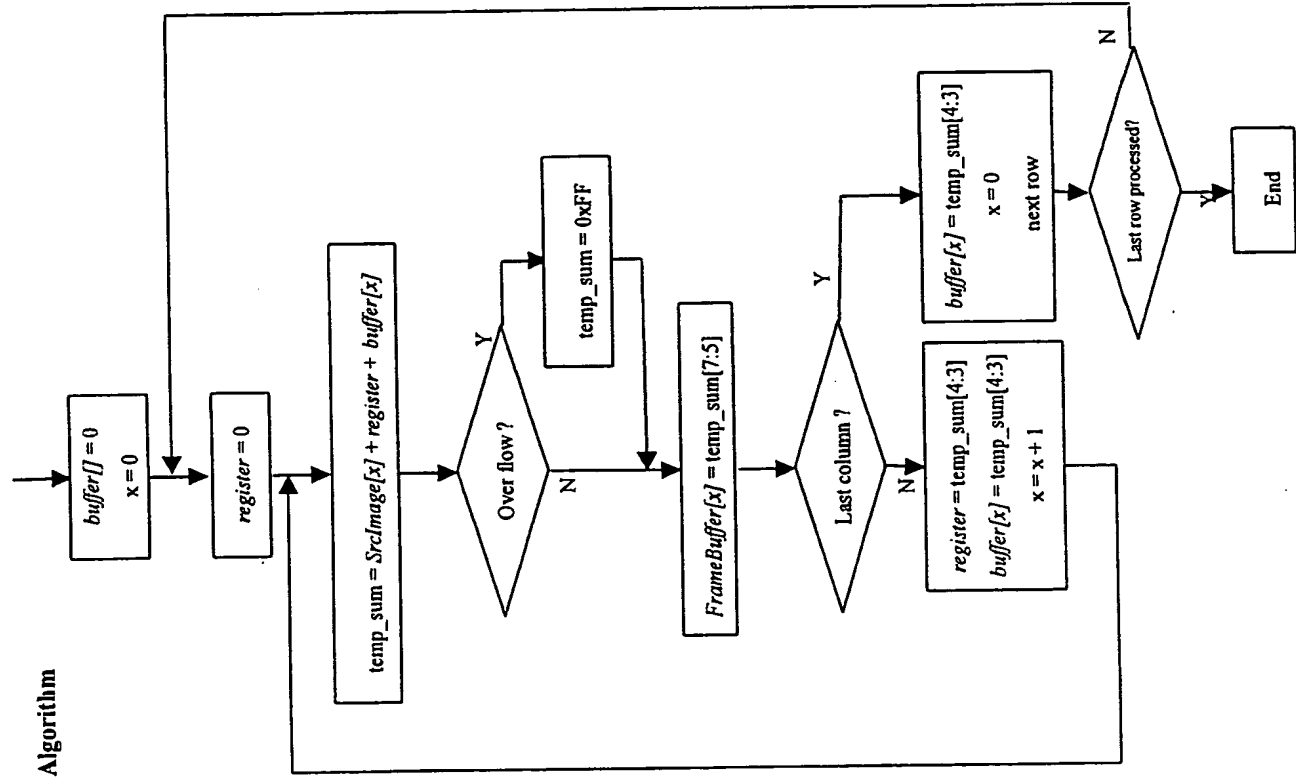


Fig. 8

Notation

buffer[]

buffer store one line of
diffused error for the
row below, each cell of
the buffer has 2 bits

register

register store diffused
error for pixel to the
right, 2 bits

FrameBuffer[]

MSB part of the display
buffer memory, each
cell has 3 bits

SrcImage[]

original image pixel
data fed via the display
interface to the host
system

X[a:b]

b, b+1, ..., a-1, a bit of
data X

10/11

```

module ErrorDiffuse(R_i, clk, R_o);

input    [7:0]  R_i;
input    clk;
output   [2:0]  R_o;
reg      [1:0]  error_n[1:raw], error_n[1];
wire     [7:0]  temp_R;
integer    raw_cnt, line_cnt;

if((line_cnt==1)&&(raw_cnt==1))
    assign temp_R=R_i;
else if((line_cnt==1)&&(raw_cnt!=1))
    assign temp_R=R_i+(error_n[1],2'b00)<R_i?8'hFF:R_i+(error_n[1],2'b00);
else if((line_cnt!=1)&&(raw_cnt==1))
    assign temp_R=R_i+(error_n[raw_cnt],2'b00)<R_i?8'hFF:R_i+(error_n[raw_cnt],2'b00);
else
    assign temp_R=R_i+(error_n[raw_cnt],2'b00)+(error_n[1],2'b00)<R_i?8'hFF:R_i+(error_n[1],2'b00);

always @ (posedge clk)
begin
    error_n[1] = temp_R[4:3];
    error_n[raw_cnt] = error_n[1];
end

assign R_o = temp_R[7:5];

endmodule

```

Fig. 9

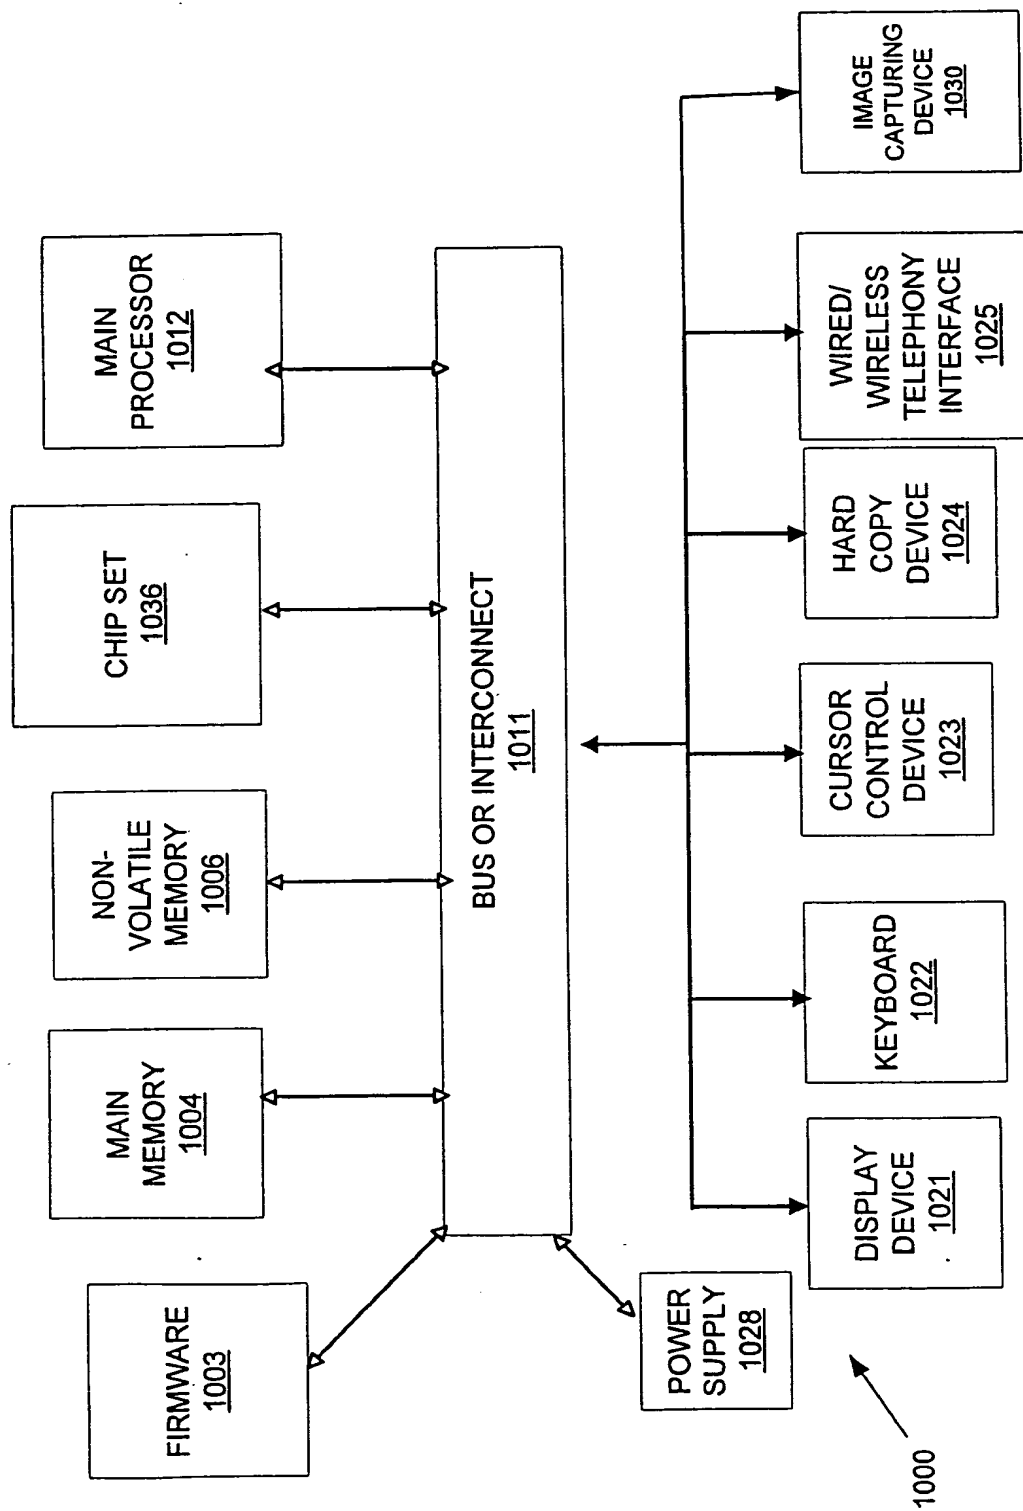


FIG. 10